
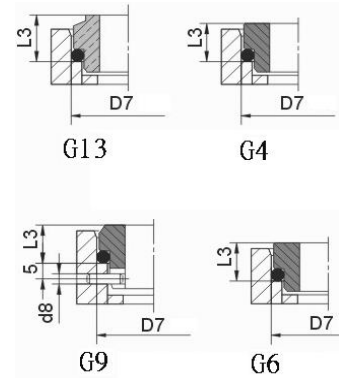


TYPE M3N

Stationary

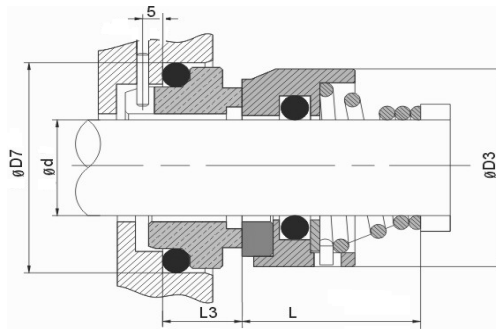

Specification

Temperature : $-20^{\circ}\text{C} \sim 180^{\circ}\text{C}$

Speed : $\leq 10\text{m/sec}$

Pressure : $\leq 10\text{ kg/cm}^2$

d	D3			G13			G4			G9			G6		
	D7	L	L3	D7	L	L3	D7	L	L3	d	D7	L	L3		
10	19	19.2	15.5	7.1	20	16.9	6.6	19.2	15.5	10.0	3	20	16.9	6.6	
12	21	21.6	16.0	7.6	22	17.4	5.6	21.6	16.0	10.0	3	22	17.4	6.6	
14	23	24.6	16.5	7.6	24	17.4	5.6	24.6	16.5	10.0	3	24	17.4	6.6	
16	26	28.0	18.0	9.0	26	19.5	7.5	28.0	18.0	10.0	3	26	19.5	6.6	
18	29	30.0	19.5	10.0	31	20.5	8.0	30.0	19.5	11.5	3	31	20.5	7.5	
20	31	35.0	22.0	9.5	34	22.0	7.5	35.0	22.0	11.5	3	34	22.0	7.5	
22	33	35.0	21.5	9.5	36	23.5	7.5	35.0	21.5	11.5	3	36	23.5	7.5	
24	35	38.0	23.5	9.5	38	25.0	7.5	38.0	23.5	11.5	3	38	25.0	7.5	
25	36	38.0	26.5	9.5	39	26.5	7.5	38.0	26.5	11.5	3	39	26.5	7.5	
28	40	42.0	26.5	11.0	42	26.5	9.0	42.0	26.5	11.5	3	42	26.5	7.5	
30	43	45.0	26.5	11.0	44	25.0	10.5	45.0	26.5	11.5	3	44	25.0	7.5	
32	46	48.0	28.5	11.0	46	28.5	10.5	48.0	28.5	11.5	3	46	28.5	7.5	
33	47	-	28.5	-	47	-	-	-	28.5	11.5	3	47	-	7.5	
35	49	52.0	28.5	11.5	49	28.5	11.0	52.0	28.5	11.5	3	49	28.5	7.5	
38	53	55.0	33.5	11.5	54	32.5	10.3	55.0	33.5	14.0	4	54	32.2	9.0	
40	56	58.0	36.0	11.5	56	34.7	10.8	58.0	36.0	14.0	4	56	34.7	9.0	
43	59	60.5	38.5	11.5	59	-	12.0	60.5	38.5	14.0	4	59	-	9.0	
45	61	64.0	39.5	14.3	61	39.2	11.6	64.0	39.5	14.0	4	61	39.2	9.0	
48	64	68.4	46.0	14.3	64	44.7	11.6	68.4	46.0	14.0	4	64	44.7	9.0	
50	66	69.3	45.0	14.3	66	45.7	11.6	69.3	45.0	15.0	4	66	45.7	9.5	
53	69	-	47.0	-	69	-	-	-	47.0	15.0	4	69	-	11.0	
55	71	75.4	49.0	15.3	71	49.0	13.3	75.4	49.0	15.0	4	71	49.0	11.0	
58	76	78.4	55.0	15.3	78	52.0	13.3	78.4	55.0	15.0	4	78	52.0	11.0	
60	78	80.4	55.0	15.3	79	53.0	13.3	80.4	55.0	15.0	4	79	53.0	11.0	
63	83	-	55.0	-	83	-	-	-	55.0	15.0	4	83	-	11.0	
65	84	85.4	55.0	15.3	85	54.3	13.0	85.4	55.0	15.0	4	85	54.3	11.0	
68	88	91.5	55.0	16.0	88	55.3	13.7	91.5	55.0	18.0	4	88	55.3	11.3	