


TYPE BW

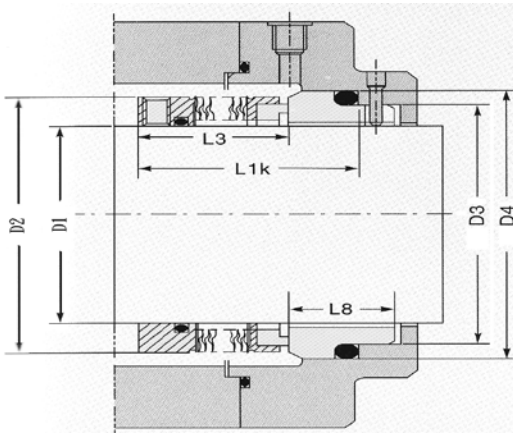

Spcification

Temperature: -40°C ~ 220°C

Pressure: 20 kg/cm

Speeds: 25 m/sec

Shaft D1	D2	D3	D4	L3	L1K	L8
16	30.0	23	27	32.5	42.5	17.5
18	32.0	27	33	30.5	37.5	14.0
20	33.5	29	35	30.5	37.5	14.0
22	36.5	31	37	30.5	37.5	14.0
24	39.0	33	39	28.5	40.0	19.5
25	39.6	34	40	28.5	40.0	19.5
28	42.8	37	43	31.0	42.5	19.5
30	45.0	39	45	31.0	42.5	19.5
32	46.0	42	48	31.0	42.5	19.5
33	48.0	42	48	31.0	42.5	19.5
35	49.2	44	50	31.0	42.5	19.5
38	52.3	49	56	31.0	45.0	22.0
40	55.5	51	58	31.0	45.0	22.0
43	57.5	54	61	31.0	45.0	22.0
45	58.7	56	63	31.0	45.0	22.0
48	61.9	59	66	31.0	45.0	22.0
50	65.0	62	70	32.5	47.5	23.0
53	68.2	65	73	32.5	47.5	23.0
55	70.0	67	75	32.5	47.5	23.0
58	71.7	70	78	37.5	52.5	23.0
60	74.6	72	80	37.5	52.5	23.0
63	79.0	75	83	37.5	52.5	23.0
65	84.1	77	85	37.5	52.5	23.0
68	87.3	81	90	34.5	52.5	26.0
70	87.3	83	92	42.0	60.0	26.0
75	95.0	88	97	42.0	60.0	26.0
80	98.4	95	105	41.8	60.0	26.2
85	104.7	100	110	41.8	60.0	26.2
90	111.0	105	115	46.8	65.0	26.2
95	114.0	110	120	47.8	65.0	25.2
100	117.4	115	125	47.8	65.0	25.2

