


TYPE 2

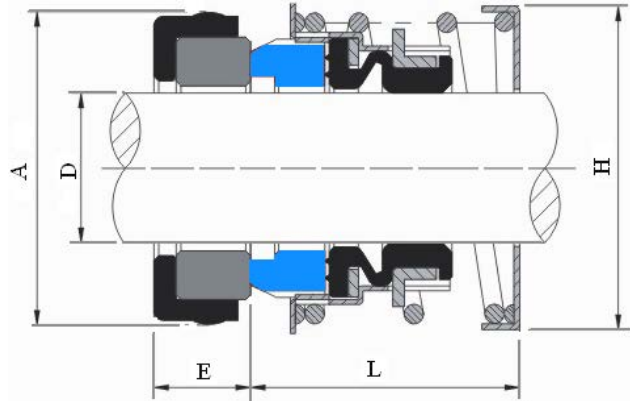

Specification

Temperature : - 20°C ~ 200°C

Pressure : $\leq 28 \text{ kg/cm}^2$

Speed : $\leq 12 \text{ m/sec}$

Shaft D	A	H	L	E
16	30	34.0	25.2	8
18	32	36.8	25.2	8
20	34	38.8	25.2	8
22	36	41.5	25.2	8
25	39	44.8	26.2	8
28	43	48.5	26.2	8
30	48	52.0	26.2	8
35	53	57.0	30.2	10
40	58	67.0	34.2	10
45	63	73.0	36.2	10
50	68	79.0	41.2	10
55	73	84.0	41.2	12
60	79	90.0	41.2	12
65	86	98.5	49.2	12
70	91	103.5	52.2	12
75	96	110.5	52.2	12

Shaft D	A	H	L	E
13	30.95	34.0	25.2	10.3
3/4	34.93	38.8	25.2	10.3
7/8	38.10	41.5	25.2	10.3
1	41.28	46.0	25.4	11.1
1 1/8	44.45	49.2	27	11.1
1 1/4	47.63	52.4	27	11.1
1 3/8	50.80	57.2	28.6	11.1
1 1/2	53.98	60.3	28.6	11.1
1 5/8	60.33	69.0	34.93	12.7
1 3/4	63.50	69.9	34.93	12.7
1 7/8	66.68	73.0	38.1	12.7
2	69.85	76.2	38.1	12.7
2 1/8	76.20	82.5	42.85	14.3
2 1/4	79.38	85.7	42.85	14.3
2 3/8	82.55	88.9	46	14.3
2 1/2	85.73	94.0	46	14.3