


TYPE 3A

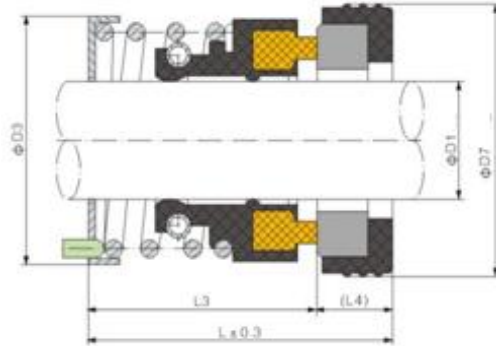

Specification

Temperature : - 20°C ~ 100°C

Pressure : $\leq 5 \text{ kg/cm}^2$

Speed : $\leq 5 \text{ m/sec}$

Shaft D1	D3	D7	L	L3	L4
8	17	18.0	18.0	13.5	4.5
8A	17	21.0	18.0	13.0	5.0
9	18.5	21.0	22.0	16.0	6.0
10	21	22.0	23.0	17.0	6.0
11	21	24.0	23.0	16.5	6.5
12	23	26.0	24.0	17.5	6.5
13	23.5	26.0	24.0	17.5	6.5
14	25	28.0	25.0	18.5	6.5
15	25	28.0	25.0	18.5	6.5
16	28.5	32.0	27.0	19.0	8.0
20	33.5	38.0	31.0	23.0	8.0
25	37.5	44.0	33.0	24.0	9.0
30	47.5	50.0	35.0	25.0	9.5